

BASIC PRODUCT INFORMATION

PRODUCT NAME	LIBRA WALL - 2.7K - B / BR / NI / PBR
ARTICLE NUMBER	38211 / 38209 / 38210 / 38212
GTIN NUMBER	TBA
PRODUCT SERIES	LIBRA
CATEGORY	SEMI RECESSED WALL LIGHT / READING LIGHT
AVAILABLE FINISHES	BLACK / BRASS / NICKEL / BRONZE
AVAILABLE OPTICS	40 °

LIGHT SOURCE

LIGHT SOURCE	FIXED COB LED
CHIP / MANUFACTURER	OSRAM
COLOR TEMPERATURE	2700 K
COLOR RENDERING INDEX	CRI 93 (Ra 93.5)
R9	69
TM-30	Rf 94 / Rg 98
SDCM (MacAdam)	1.4
LUMINOUS FLUX	208.5 lm
EFFICACY	57.9 lm/W
POWER (WATTAGE)	3.5 W

ELECTRICAL DATA

DRIVER	PHASE-CUT / DALI
RATED VOLTAGE	220 - 240 VAC
FREQUENCY	50 Hz
CURRENT	700 mA
SYSTEM POWER	3.6 W
CONNECTION	Quick-connector (phase cut)
ELECTRICAL INSULATION CLASS	CLASS III
USB CHARGING	USB-C, 2A - 10W
DIMMING	YES, ROTATING KNOB WITH CLICK ON / OFF



IMPORTANT NOTES

- Only a qualified electrician shall perform the electrical connection.
- The earth wire (green/yellow) must always be connected to the front plate's chassis for safety reasons.
- Only use certified connectors (e.g. Wago) for power connections.
- Verify that the spacing between the mounting holes is 60mm and equal on both sides of the box's center — deviation may cause a poor fit between the back and front plate.
- The product is intended for indoor use in dry rooms only.

PHOTOMETRIC DATA

LENS : 40 °

UGR: < 10 (at standard reflectance pcc=70%, pw=50%, pwp=20%)

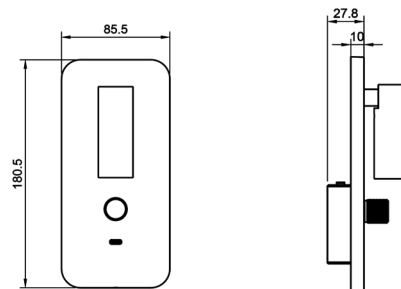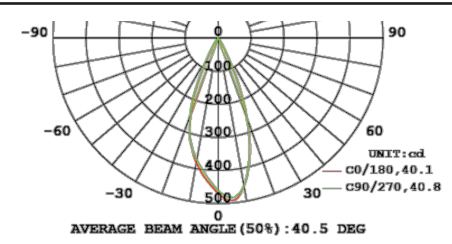

RELEVANT ARTICLE NUMBERS

TYPE	PRODUCT NAME	ARTICLE NUMBER
WALL LIGHT	LIBRA_B (BLACK)	38011
WALL LIGHT	LIBRA_BR (BRASS)	38209
WALL LIGHT	LIBRA_NI (NICKEL)	38210
WALL LIGHT	LIBRA_GM (GUNMETAL)	38208
WALL LIGHT	LIBRA_PBR (BRONZE)	38212

MECHANICAL / PHYSICAL

MATERIAL	ALUMINIUM
SURFACE TREATMENT	POWDER COAT / ANODISING
DIMENSIONS (H x W x D)	180 mm x 85 mm x 10 mm
DIMENSIONS SPOT (Ø x L)	Ø 27.4 x 72 mm
DIMENSIONS DRIVER (H x W x D)	57 mm x 35 mm x 23 mm
CUTOUT	1 1/2 wall box (See assembly guide)
WEIGHT	0.4 kg (420 g)
IP RATING	IP 20
RECESSED DEPTH	17.8 mm
MOUNTING HOLE SPACING	60 mm (equal distance from box center on both sides)

WARRANTY

WARRANTY PERIOD	5 YEARS
LIFESPAN	50.000 h
ENERGY CLASS	G (EU 2019/2015)

PRECAUTIONS

- Do not use a damaged cable or loose connection.
- Do not overload the USB-C output beyond 2A.
- Do not perform electrical work without first turning off the power.



IP 20



cutout:
2xØ73mm
(1.5 wall box)

