


1.0 - PRODUCT INFORMATION


LIBRA WALL is a wall lamp with an integrated adjustable and dimme-able reading light with integrated USB-C charger. The lamp is available in five finish variants (Black, Brass, Nickel, Gunmetal and Bronze) and is suitable for mounting by the bedside, in a reading nook or other indoor living spaces. The product is designed to be installed in a standard 1.5 wall box.

2.0 - INSTALLATION


2.1 - Make sure the power is disconnected. Run the cable to the planned location.




2.3 - Mount the wall box and prepare the cables.

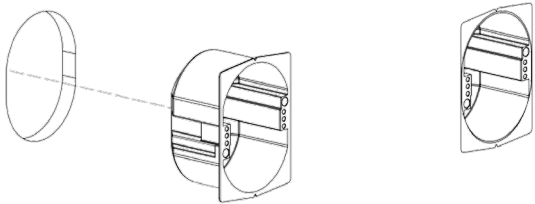


2.5 - Mount the back plate onto the wall box using the supplied M3 screws. Attach the back plate to the wall using the supplied fixings. Note: use wall plugs when mounting into plaster/gypsum board etc. Ensure equal center spacing (60mm) from the box center on both sides.

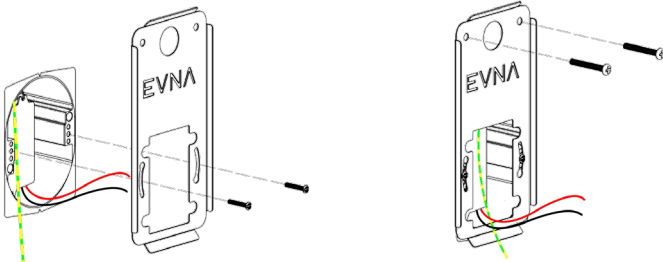


2.2 - Drill out the cut-out for the 1.5 standard wall box using Ø73 mm hole saw. Specialized tooling for this can be used for easier installation (EL.nr 88 147 57)

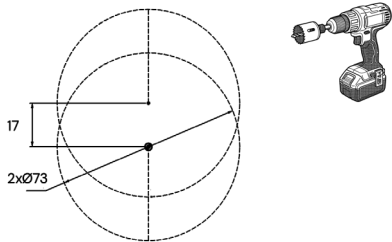


2.4 - Connect the power cables to the primary side of the 24V DC driver using certified connectors (e.g. Wago)

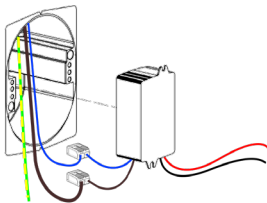

2.6 - Connect the Libra front plate to the driver's output (Red + and Black –) using Wago. Make sure to connect the earth wire (green/yellow) to the front plate's chassis.

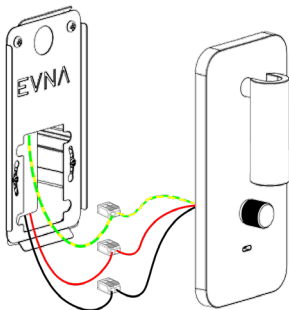

2.7 - Attach the front plate to the back plate by tightening the set screw.

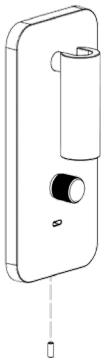

2.8 - Turn the power back on and verify that the product functions correctly.

